


CL3000N




19" Lightweight PS/2-USB LCD Console

The CL3000 19" Lightweight PS/2-USB LCD Console is an integrated KVM (keyboard, monitor, and mouse) console module that serves as the front end console for compatible KVM switches.

Lightweight and with a 19" power-saving LED-backlit LCD, the CL3000 offers a space-saving, streamlined approach to KVM switch technology by integrating a keyboard, LED-backlit LCD monitor, and touchpad in a 1U housing. Additional console ports allows the second user local access, while in conjunction with an ATEN on the NET™ or KVM Extender, you can remotely control computers in different locations just as if you were right there in front of them.



Setup

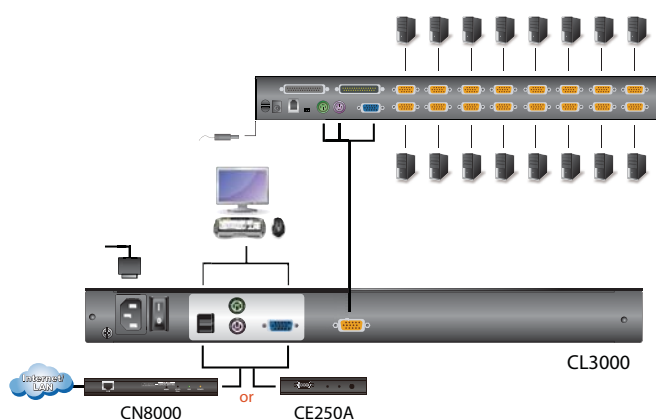

Features

- Integrated KVM console featuring a **19" LCD monitor** in a Single-Rail Slideaway™ housing
- **Green power LED-backlit LCD monitor** saves energy
- **Lightweight design** for easier installation
- **Dual Interface** – supports computers with PS/2 or USB keyboards and mice
- Additional hot-pluggable USB mouse port on the front panel (also functions as a USB peripheral port)
- Multiplatform support – Windows, Linux, Mac, and Sun
- Superior video quality – up to 1280 x 1024 @ 75 Hz; DDC2B
- Firmware upgradable
- **Extra console port** – manage computers from an external console (monitor, USB or PS/2 keyboard and mouse)
- Console lock – the console remains securely locked away when not in use
- Slideaway™ housing is slightly less than 1U with top and bottom clearance for smooth operation in 1U of rack space
- DDC emulation – video settings of each computer are automatically adjusted for optimal output to the monitor
- Adjustable depth to fit within a rack
- Standard 105-key keyboard

Specifications

Function			CL3000
Computer Connections			1
Console Selection			Hotkey
Connectors	External Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple) 1 x USB Type A Female (Black)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x 6-pin Mini-DIN Female (Green) 1 x USB Type A Female (Black)
	KVM Ports		1 x SPHD-18 Male (Yellow)
	USB Port		1 x USB Type A Female (Black)
	Power		1 x 3-prong AC Socket
Switches	Reset		1 x Semi-recessed Pushbutton
	Power		1 x Rocker
	F/W Upgrade		1 x Slide
	LED Power		1 x Pushbutton
	LED Adjustment		4 x Pushbutton
LEDs	Power		1 (Green)
		Num	1 (Green)
	Lock	Caps	1 (Green)
		Scroll	1 (Green)
Emulation	Keyboard / Mouse		PS/2; USB
Video	1280 x 1024 @ 75Hz, DDC2B		
I/P Rating	100–240VAC; 50–60Hz; 1A		
Power Consumption	120V, 21.4W / 230V, 22.7W		
Environment	Operating Temp.		0–40° C
	Storage Temp.		–20–60° C
	Humidity		0–80% RH, Non-condensing
Physical Properties	Housing		Metal
	Weight		8.41 kg
	Dimensions (L x W x H)		58.51 x 48.50 x 4.40 cm

* Product specifications and appearance are subject to change without notice.



ATEN Technology
19641 Da Vinci, Foothill Ranch, CA 92610
Phone: 888.999.ATEN (2836) Fax: 949.428.1100

ATEN North America

ATEN New Jersey - SI/VAR Division
155 Pierce Street, Somerset, NJ 08873
Phone: 888.999.ATEN (2836) ext. 2300 Fax: 732.356.1639

Email: sales@aten-usa.com

Website: www.aten-usa.com

